


# K2/SB28

user manual (EN)

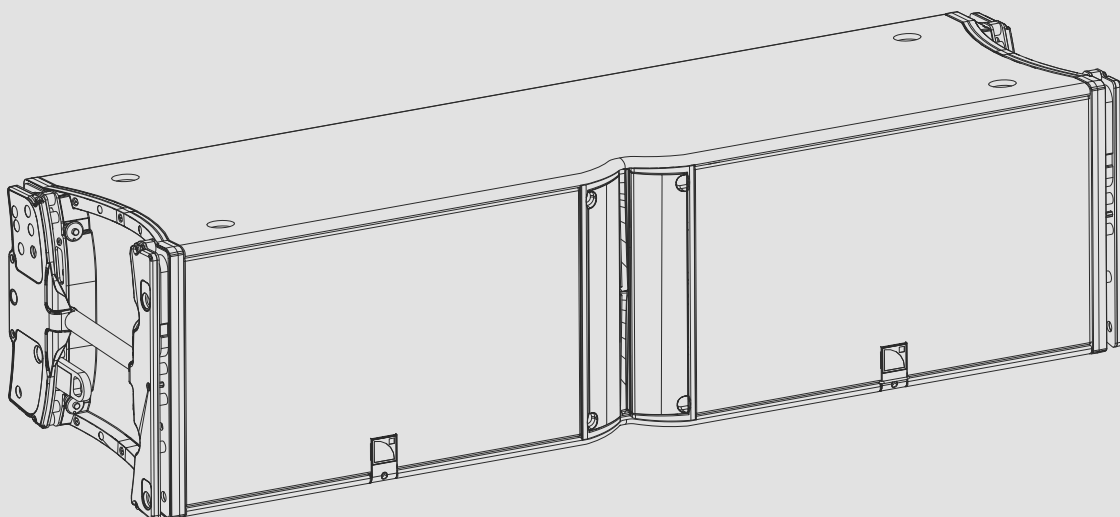

Document reference: K2/SB28 user manual (EN) version 4.0

Distribution date: April 4, 2016

© 2016 L-Acoustics. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means without the express written consent of the publisher.

## Contents

Safety.....	4
Instructions.....	4
Symbols.....	4
Welcome.....	5
System components.....	6
Technical description.....	7
K2 horizontal directivity settings.....	7
K1-SB applications.....	8
Loudspeaker configurations.....	9
Line source.....	9
Additional subwoofer system.....	11
K1-SB.....	11
SB28.....	15
Loudspeaker connection.....	17
Connectors.....	17
Connection to LA4X.....	18
Connection to LA8.....	19
Preset description.....	21
Recommendation for speaker cables.....	22
Illustrations.....	23
Loudspeaker cables.....	23
Specifications.....	24
K2 specifications.....	24
K2 dimensions.....	25
K1-SB specifications.....	26
K1-SB dimensions.....	26
SB28 specifications.....	27
SB28 dimensions.....	27

# Safety

## Instructions

---

**Inspect the product before operation.**

If any sign of defect or damage is detected, immediately withdraw the product from use for maintenance.

**Never incorporate equipment or accessories not approved by L-Acoustics.**

**Read all the related PRODUCT INFORMATION documents shipped with the products before exploiting the system.**



**Do not store the product on an unstable cart, stand, tripod, bracket, or table.**

**Beware of sound levels.**

Do not stay within close proximity of loudspeakers in operation.

Loudspeaker systems are capable of producing very high sound pressure levels (SPL) which can instantaneously lead to permanent hearing damage to performers, production crew and audience members. Hearing damage can also occur at moderate level with prolonged exposure to sound.

Check the applicable laws and regulations relating to maximum sound levels and exposure times.

**Read the RIGGING MANUAL before installing the system.**

Use the rigging accessories described in the rigging manual and follow the associated procedures.

**Read the maintenance section of this document before servicing the product.**

**Do not expose the product to extreme conditions.**

Do not expose the product to rain or sea spray.

Do not expose the product to moisture (mist, steam, humidity, condensation...) or excessive heat (direct sun, radiator...) for a long period of time.

**Contact L-Acoustics for advanced maintenance.**

Refer to the product warranty.

## Symbols

---

The following symbols are used in this document:



This symbol indicates a potential risk of harm to an individual or damage to the product.

It can also notify the user about instructions that must be strictly followed to ensure safe installation or operation of the product.



This symbol notifies the user about instructions that must be strictly followed to ensure proper installation or operation of the product.



This symbol notifies the user about complementary information or optional instructions.

# Welcome

Thank you for purchasing the L-Acoustics K2.

This document contains essential information on using the system properly. Carefully read this document in order to become familiar with the system.

**As part of a continuous evolution of techniques and standards, L-Acoustics reserves the right to change the specifications of its products and the content of its document without prior notice.** Please check [www.l-acoustics.com](http://www.l-acoustics.com) on a regular basis to download the latest document and software updates.

## System components

### Loudspeaker enclosures

K2	3-way full-range active WST enclosure
K1-SB	K1-SB system subwoofer 2 x15"
SB28	high power subwoofer 2x18"

### Powering and driving system

LA4X / LA8	amplified controller with DSP, preset library and networking capabilities
LA-RAK	touring rack containing three LA8, for power, audio and network distribution
L-Case	protection case for L-Acoustics 2U electronics



Refer to the LA4X / LA8 user manual for operating instructions.

### Loudspeaker cables

SP cables	4-point speakON loudspeaker cables (4 mm <sup>2</sup> gauge) SP cables come in four sizes: SP.7 (0.7 m/2.3 ft), SP5 (5 m/16.4 ft), SP10 (10 m/32.8 ft) and SP25 (25 m/82 ft)
SP-Y1	breakout cable for two passive enclosures (2.5 mm <sup>2</sup> gauge) provided with a CC4FP adapter 4-point speakON to 2 x 2-point speakON
DO cables	8-point PA-COM loudspeaker cables (4 mm <sup>2</sup> gauge) DO cables come in three sizes: DO.7 (0.7 m/2.3 ft), DO10 (10 m/32.8 ft) and DO25 (25 m/82 ft)
DOSUB-LA8	breakout cable for four passive enclosures (4 mm <sup>2</sup> gauge) 8-point PA-COM to 4 x 2-point speakON
speakON to PA-COM interface	cable for one 3-way active enclosure  2 x 4-point speakON to 8-point PA-COM  This cable is not provided and needs to be custom made.



**Information about the connection of the enclosures to the LA amplifiers is given in this document.**

Refer to the LA4X / LA8 user manual for detailed instructions about the whole cabling scheme, including modulation cables and network.

### Rigging elements



Rigging elements or procedures are not presented in this document.  
Refer to the K2 rigging manual.

### Software applications

Soundvision	3D acoustical and mechanical modeling software
LA Network Manager	software for remote control and monitoring of amplified controllers




Refer to the **LA Network Manager video tutorial**.  
Refer to the **Soundvision** help.

# Technical description

## K2 horizontal directivity settings

The K2 enclosure features an adjustable horizontal directivity system. Using the adjustable fins, horizontal directivity can be adjusted with four different settings: 110° / 70° symmetric or 90° asymmetric (35°/55° or 55°/35°). A specific K2 preset must be used for each directivity setting.



Within a line source, different directivity settings can be combined to improve the coverage of the audience geometry.

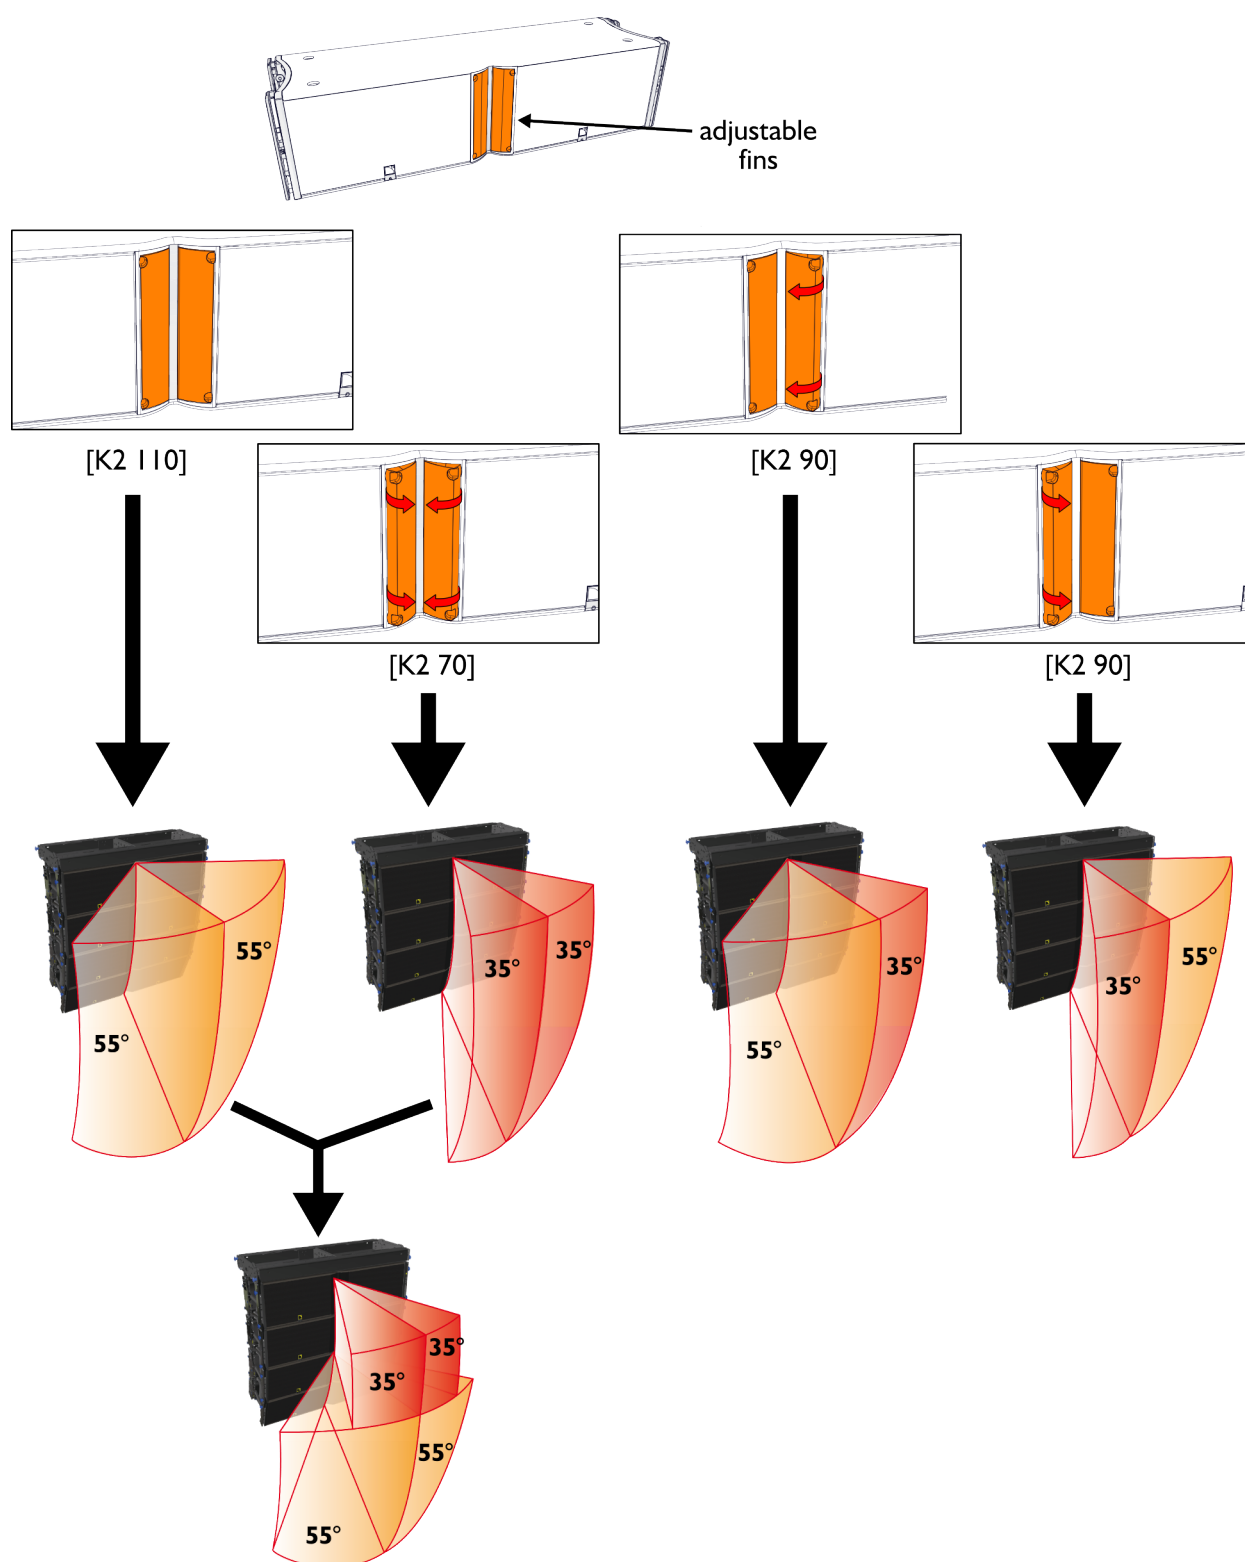

K1-SB applications

- There are two distinct applications for K1-SB in a K2 system:
- As an LF extension in a line source for enhanced throw, using the [K1SB\_X K2] preset with K2
  - As a subwoofer for increased impact, using the [K1SB\_60] preset

**i** Both applications of K1-SB can be combined in the same configuration.

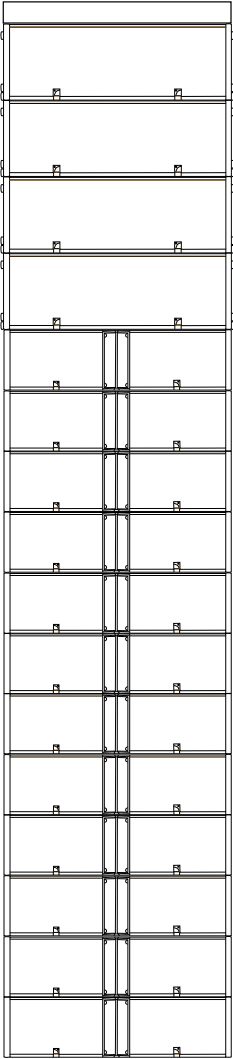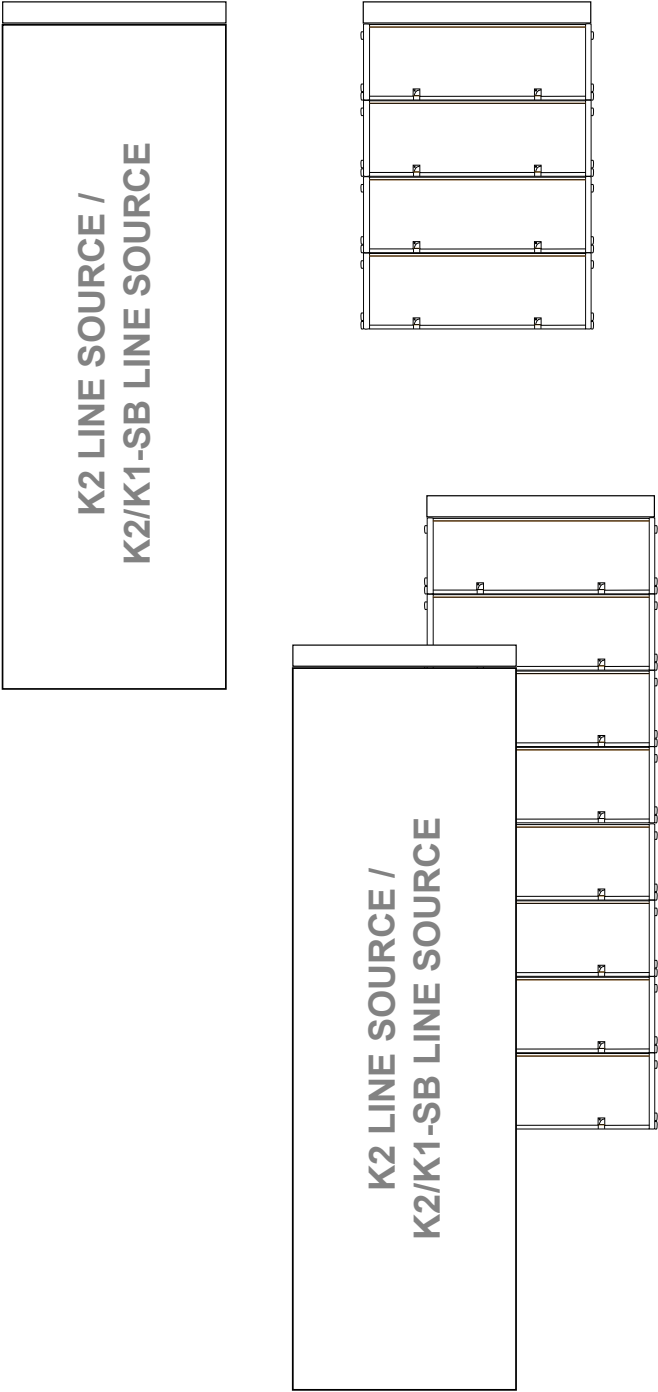K1-SB as an LF extension in a line source	K1-SB as a subwoofer
	
ENHANCED THROW	INCREASED IMPACT



# Loudspeaker configurations

## Line source

Deployed as a line source, the system operates over the nominal bandwidth of the K2 enclosure, with an adjustable horizontal directivity.

- Two configurations are possible:
- K2 line source
  - K2/K1-SB line source: enhanced LF throw

The [K2 70], [K2 90] and [K2 110] presets allow for a reference frequency response in long throw applications. Each preset is dedicated to a horizontal directivity setting.

By providing the K1-SB with the same frequency response as the K2 low section, the [K1SB\_X K2] preset allows the K1-SB enclosure to be used as an LF line source element, increasing the length of the sub-low line source.


The K2 enclosures are driven by the LA4X / LA8 amplified controllers.

The K1-SB enclosures are driven by the LA8 amplified controller.


## Standalone K2 line source

Enclosure	K2
Preset	[K2 70] [K2 90] [K2 110]
Frequency range (-10 dB)	35 Hz - 20 kHz

K2/K1-SB line source

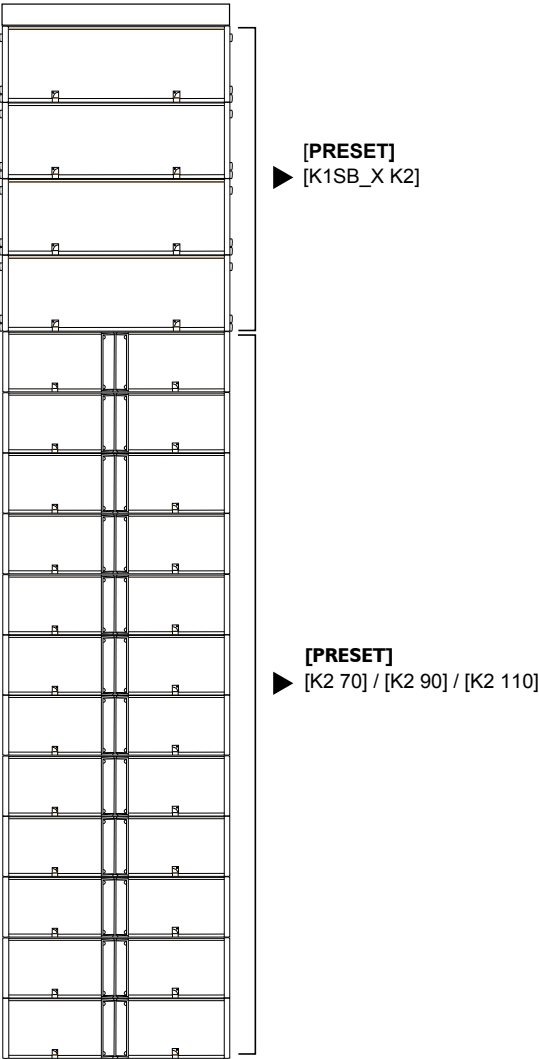

Enclosure	K2	K1-SB
Preset	[K2 70] [K2 90] [K2 110]	[K1SB_X K2]
Frequency range (-10 dB)	35 Hz- 20 kHz	
Recommended ratio	3 K2 : 1 K1-SB	
Minimum line length	12 K2 + 4 K1-SB	

 When using [K2] with [K1SB\_X K2], do not add any delay value between the K2 and K1-SB elements of a same line source.

## Additional subwoofer system

---

A K2 line source or a K2/K1-SB line source can be deployed with additional subwoofer enclosures to provide increased sub-low resources to demanding applications.

Two subwoofer systems are available:

- K1-SB for increased LF contour
- SB28 for infra extension

The recommended ratio is 3 K2 for 2 subwoofers, whether using K1-SB subwoofers only, SB28 subwoofers only, or a combination of both.

The [K1SB\_60] and [SB28\_60] presets provide the subwoofers with an upper frequency limit at 60 Hz for an optimal frequency coupling with the line source.

The K1-SB and SB28 subwoofer enclosures are driven by the LA8 amplified controller.


### K1-SB

The K1-SB provides an extension of the bandwidth in the low end, down to 30 Hz. Depending on the deployment, LF rejection can be produced.

Three deployments are available in this configuration:

- K1-SB on top of the K2 line source
- K1-SB beside the K2 or K2/K1-SB line source : side LF rejection (polarized)
- K1-SB behind the K2 or K2/K1-SB line source : rear LF rejection (cardioid)

Line source with K1-SB on top

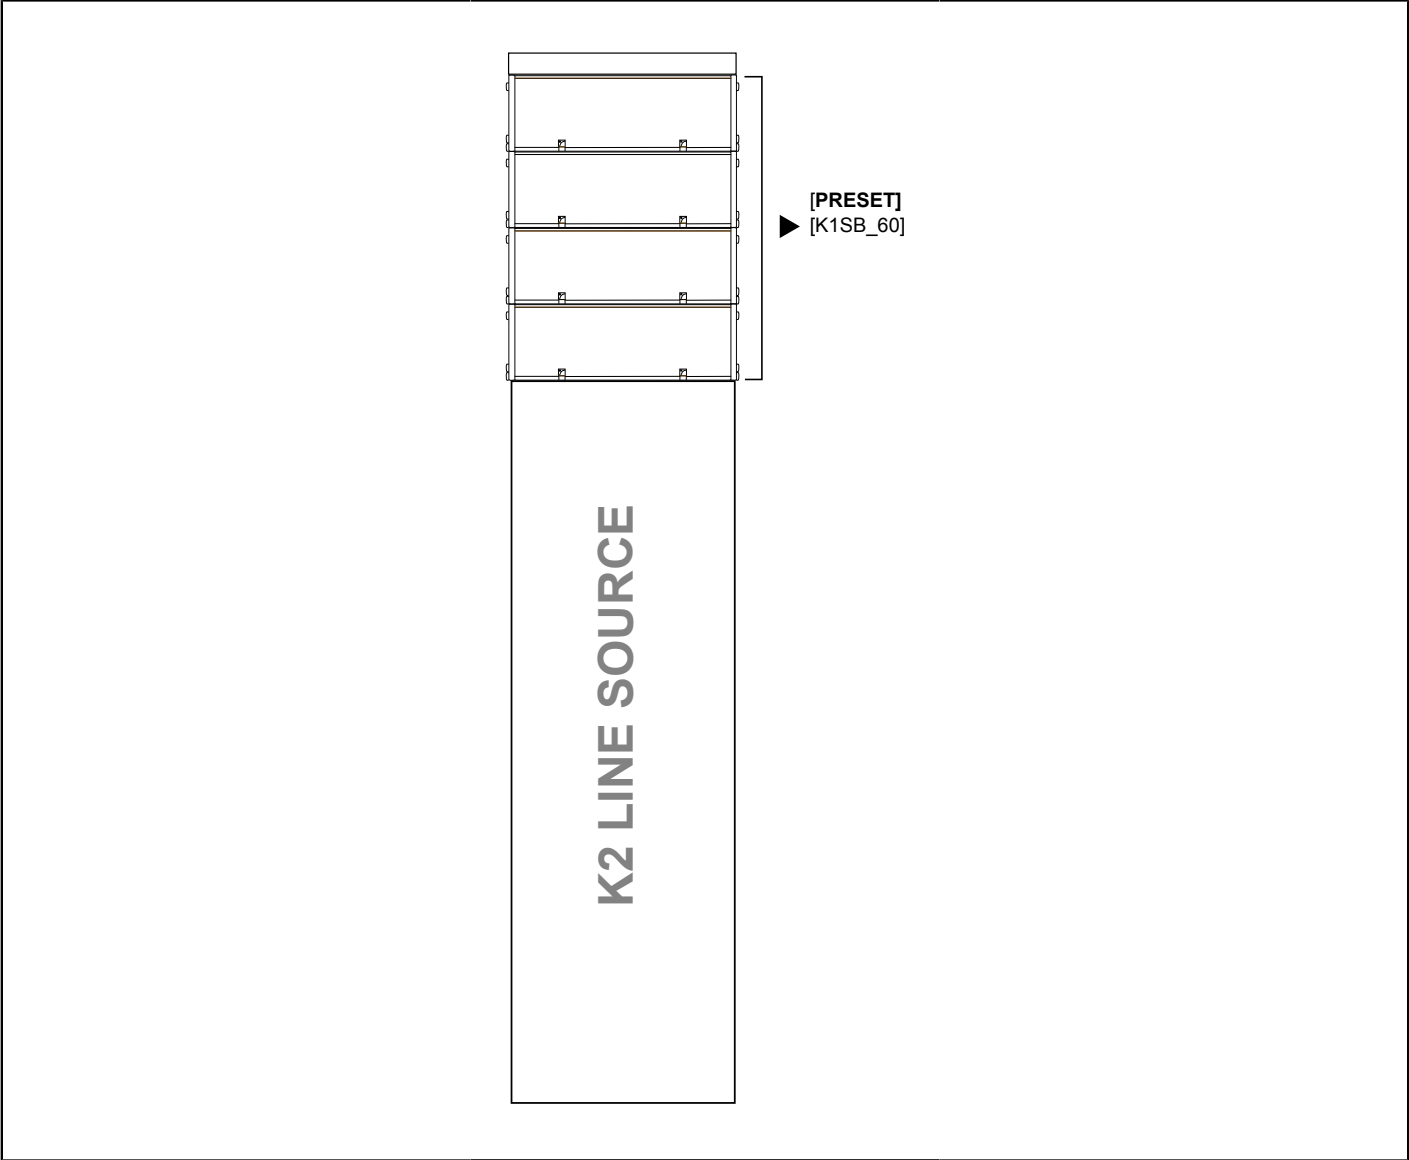

Enclosure	K2	K1-SB as subwoofer
Preset	[K2 70][K2 90][K2 110]	[K1SB_60]
Frequency range (-10 dB)	30 Hz - 20 kHz	
Recommended ratio	3 K2 : 2 subwoofers	
Maximum number line length	12 K2 + 4 K1-SB	




Delay values

Do not forget to add the pre-alignment and geometric delays depending on the configuration.

Pre-alignment delays

[K2] + [K1SB_60]	K2 = 6 ms	K1-SB = 0 ms
------------------	-----------	--------------

Line source with K1-SB beside

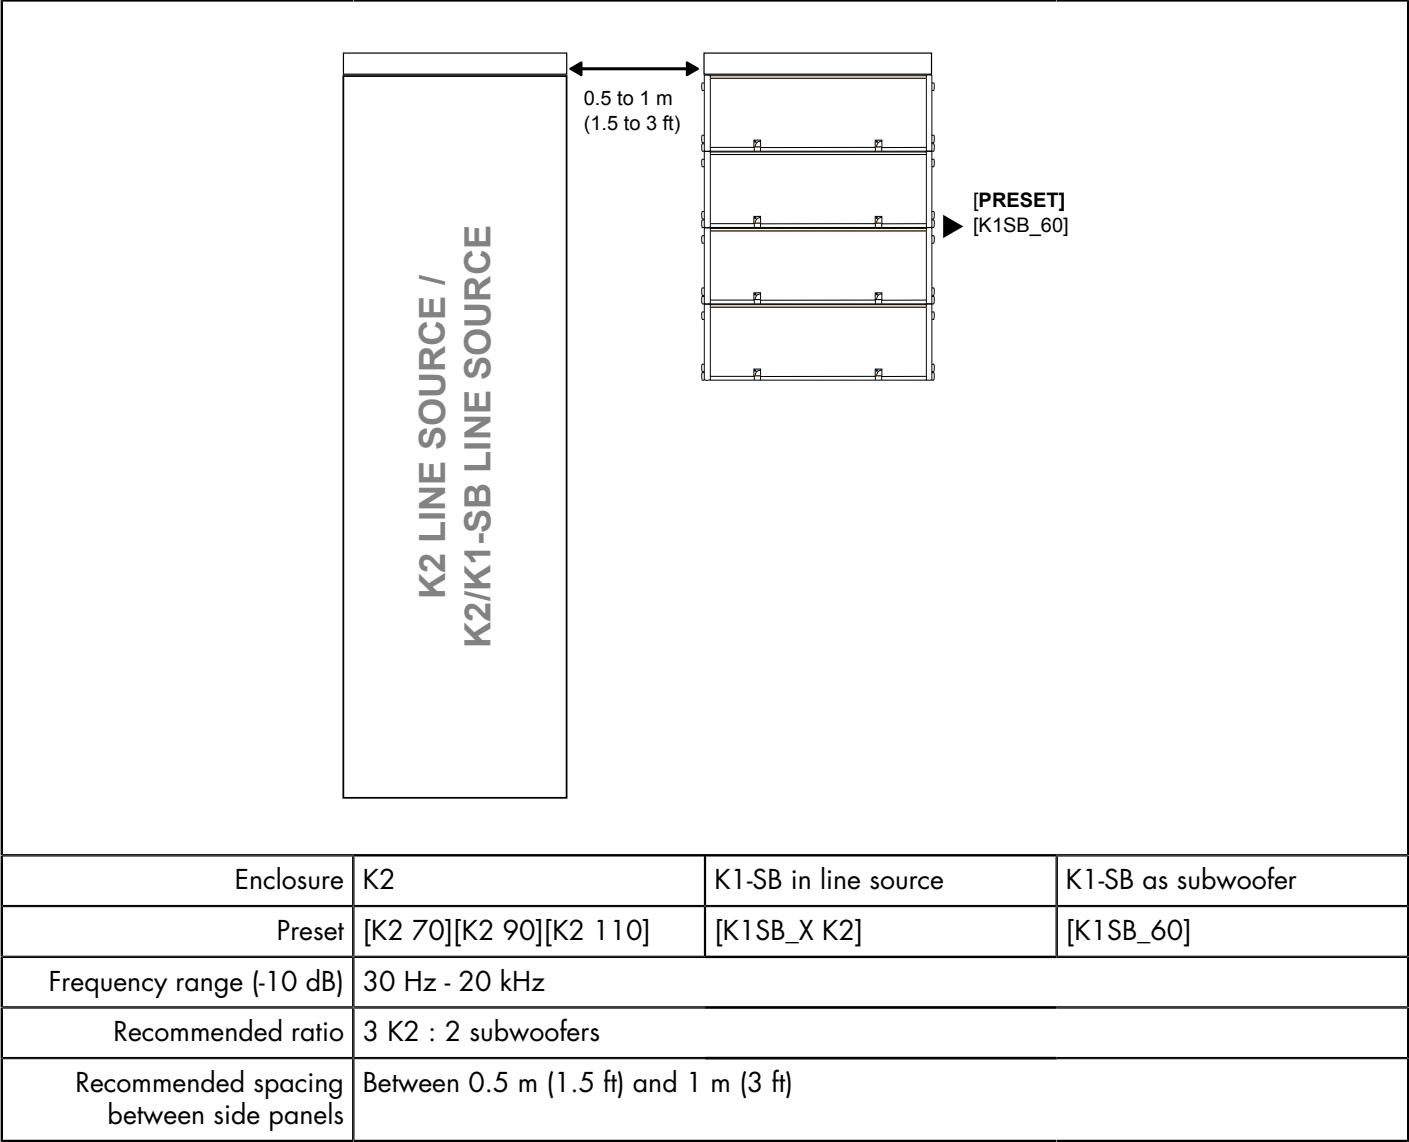


- ! Delay values**  
Do not forget to add the pre-alignment and geometric delays depending on the configuration.
- !**   
When using [K2] with [K1SB\_X K2], do not add any delay value between the K2 and K1-SB elements of a same line source.


Pre-alignment delays


[K2] + [K1SB_60]	K2 = 6 ms	K1-SB = 0 ms
------------------	-----------	--------------

Line source with K1-SB behind

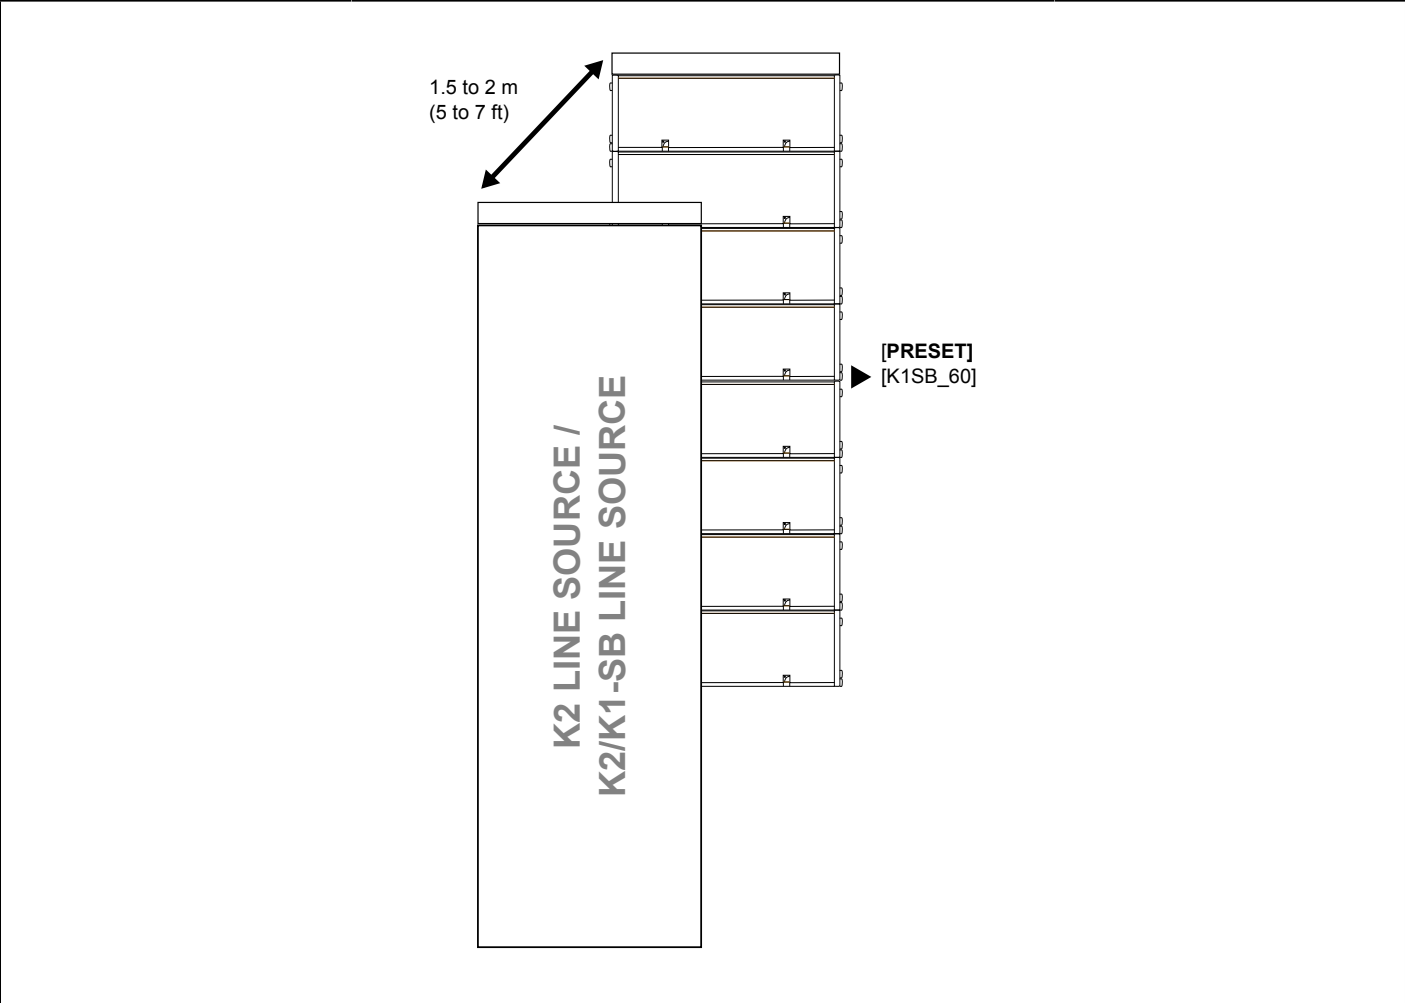

Enclosure	K2	K1-SB in line source	K1-SB as subwoofer
Preset	[K2 70][K2 90][K2 110]	[K1SB_X K2]	[K1SB_60]
Frequency range (-10 dB)	30 Hz - 20 kHz		
Recommended ratio	3 K2 : 2 subwoofers		
Recommended spacing between front faces	Between 1.5 m (5 ft) and 2 m (7 ft)		

- **Delay values**

Do not forget to add the pre-alignment and geometric delays depending on the configuration.
- 

When using [K2] with [K1SB\_X K2], do not add any delay value between the K2 and K1-SB elements of a same line source.

Pre-alignment delays

[K2] + [K1SB_60]	K2 = 6 ms	K1-SB = 0 ms
------------------	-----------	--------------

Geometric delays

1.5 m (5 ft)	Line source = 4.5 ms
2 m (7 ft)	Line source = 6 ms

SB28

The SB28 provides an extension of the bandwidth in the low end, down to 25 Hz.

Line source with SB28

K2 LINE SOURCE /  
K2/K1-SB LINE SOURCE

[PRESET]  
[SB28\_60]

Enclosure	K2	K1-SB in line source	K1-SB as subwoofer	SB28
Preset	[K2 70][K2 90][K2 110]	[K1SB_X]	[K1SB_60]	[SB28_60]
Frequency range (-10 dB)	25 Hz - 20 kHz			
Recommended ratio	3 K2 : 2 subwoofers			

- !

**Grouping subwoofers**

Place the subwoofer enclosures side by side. If not possible, the maximum distance between two adjacent acoustic centers must be 2.8 m or 1.7 m if the upper frequency limit of the subwoofer system is at 60 Hz or 100 Hz, respectively.
- i

**Use [xxxx\_xx\_C] on a reversed subwoofer in a cardioid configuration**

The cardioid configuration consists in reversing 1 element in an array of 4 subwoofers. Refer to the subwoofer user manual and to the **Cardioid configurations** technical bulletin.

**Delay values**

Do not forget to add the pre-alignment and geometric delays depending on the configuration.



When using [K2] with [K1SB\_X K2], do not add any delay value between the K2 and K1-SB elements of a same line source.

**Pre-alignment delays**


[K2] + [SB28_60]	K2 = 0 ms	SB28 = 6 ms	
[K2] + [SB28_60_C]	K2 = 0 ms	SB28 = 0.5 ms	
[K2] + [K1SB_60] + [SB28_60]	K2 = 8 ms	K1-SB = 2 ms	SB28 = 0 ms
[K2] + [K1SB_60] + [SB28_60_C]	K2 = 13.5 ms	K1-SB = 7.5 ms	SB28 = 0 ms



# Loudspeaker connection

## Connectors


The K2 is equipped with two 8-point PA-COM connectors.

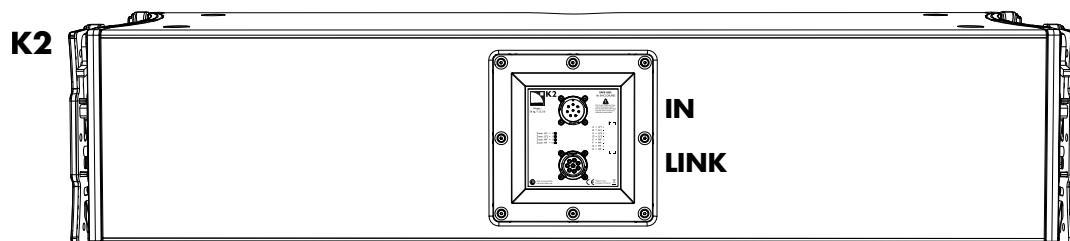


### Internal pinout for L-ACOUSTICS 3-way active enclosures

PA-COM points	A/B	C/D	E/F	G/H
Transducer connectors	left LF	right LF	MF	HF

The K1-SB is equipped with one 4-point speakON connector.

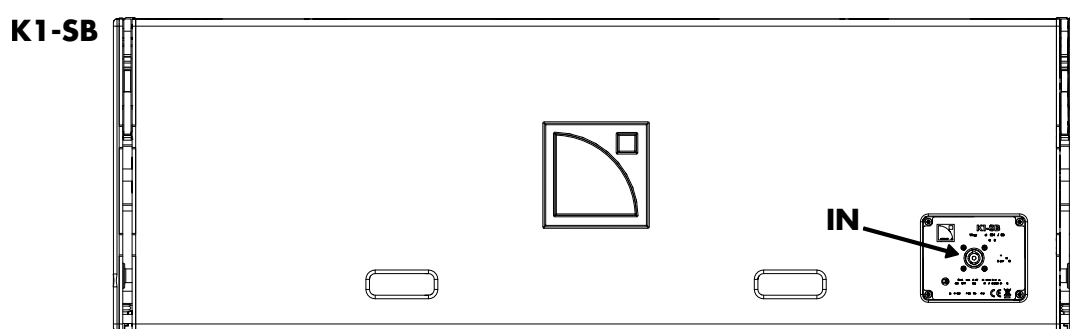

The SB28 is equipped with one 4-point speakON connector.

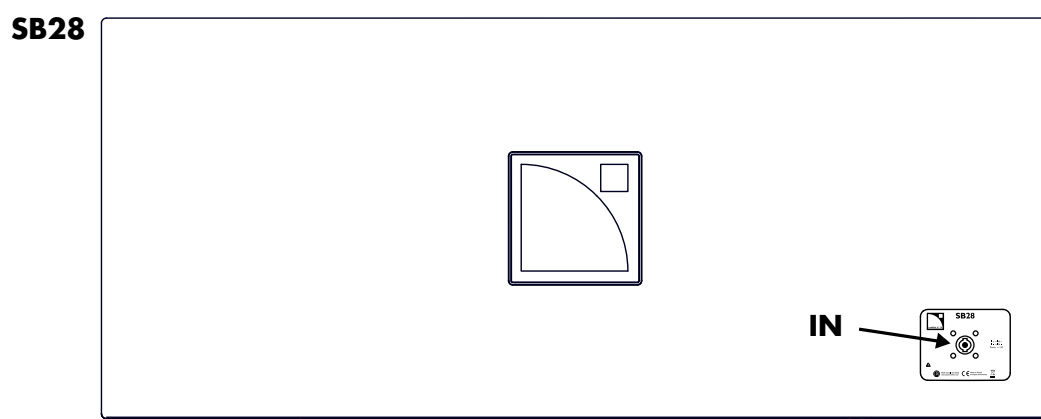

### Internal pinout for L-ACOUSTICS subwoofers

speakON points	1 +	1 -	2 +	2 -
Transducer connectors	LF +	LF -	Not linked	Not linked

Connection to LA4X

Maximum number of enclosures per LA4X

enclosure	max enclosures in parallel	max enclosures per controller
K2	1	1

Impedance load


K2

- 1 enclosure: LF 8 Ω / MF 8 Ω / HF 16 Ω
- 2 enclosures in parallel: LF 4 Ω / MF 4 Ω / HF 8 Ω

Connecting 3-way active enclosures

3-way active enclosure on speakON output - custom speakON to PA-COM interface

**i** L-Acoustics does not supply the speakON-to-PA-COM interface.  
It must be built with two 4-point speakON connectors and a female 8-point PA-COM connector (no cable clamp).

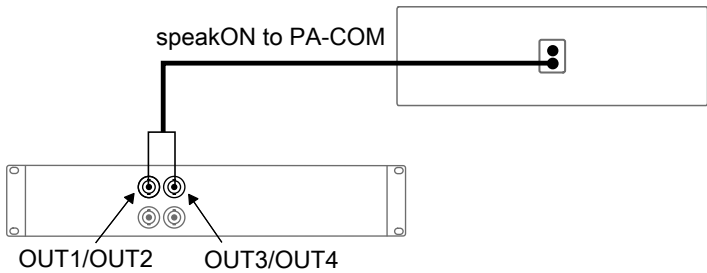

## Connection to LA8

### Maximum number of enclosures per LA8

enclosure	max enclosures in parallel	max enclosures per controller
K2	3	3
K1-SB	1	4
SB28	1	4

### Impedance load

K2

1 enclosure: LF 8  $\Omega$  / MF 8  $\Omega$  / HF 16  $\Omega$

2 enclosures in parallel: LF 4  $\Omega$  / MF 4  $\Omega$  / HF 8  $\Omega$


3 enclosures in parallel: LF 2.7  $\Omega$  / MF 2.7  $\Omega$  / HF 5.2  $\Omega$

SB28 K1-SB

1 enclosure: 4  $\Omega$

### Connecting 3-way active enclosures

3-way active enclosure on CA-COM output - DO

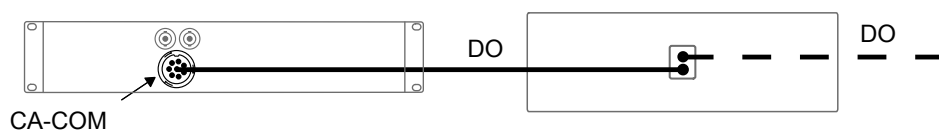


### Connecting subwoofers




#### Cardioid configuration

Connect the reversed subwoofer(s) to OUT 1 to use the cardioid preset.

Subwoofer on speakON output - SP + SP-Y1

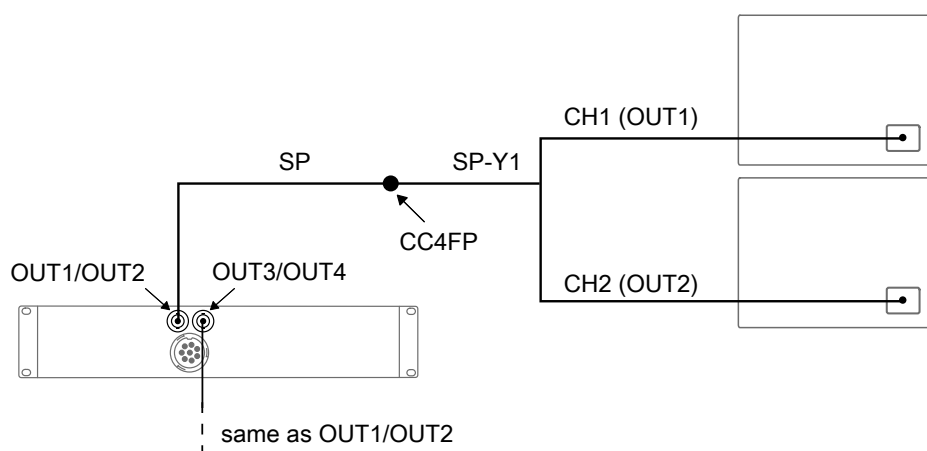

## Subwoofer on CA-COM output - DO + DOSUB-LA8

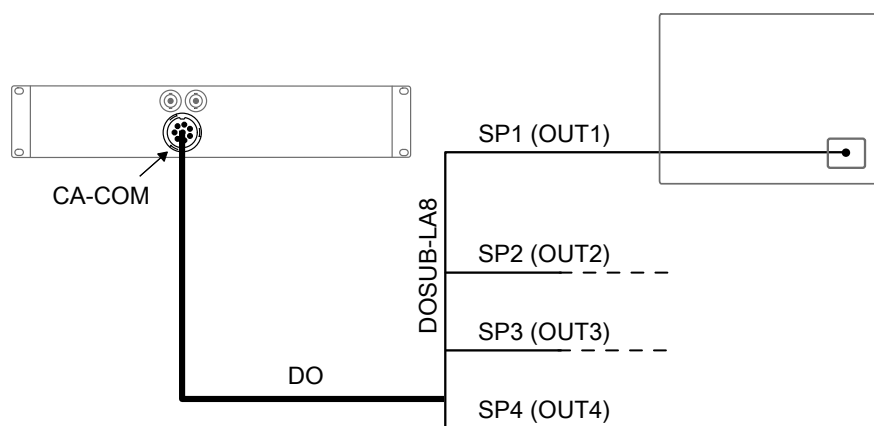

## Preset description

### [K1SB\_60] [K1SB\_X K2] [SB28\_60]

outputs	channels	routing	gain	delay	polarity	mute
OUT 1	SB	IN A	0 dB	0 ms	+	ON
OUT 2	SB	IN A	0 dB	0 ms	+	ON
OUT 3	SB	IN A	0 dB	0 ms	+	ON
OUT 4	SB	IN A	0 dB	0 ms	+	ON

### [SB28\_60\_C]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
SR	OUT 1	SR	IN A	0 dB	0 ms	+	ON
SB	OUT 2	SB					ON
SB	OUT 3	SB					ON
SB	OUT 4	SB					ON

### [K2 70] [K2 90] [K2 110]

loudspeaker elements	outputs	channels	routing	gain	delay	polarity	mute
left LF	OUT 1	LF	IN A	0 dB	0 ms	+	ON
right LF	OUT 2	LF					ON
MF	OUT 3	MF					ON
HF	OUT 4	HF					ON

## Recommendation for speaker cables

Follow the recommended maximum length for loudspeaker cables to ensure minimal SPL attenuation.



### Cable quality and resistance

Only use high-quality fully insulated speaker cables made of stranded copper wire.

Use cables with a gauge offering low resistance per unit length and keep the cables as short as possible.

The table below provides the recommended maximum length for loudspeaker cables depending on the cable gauge and on the impedance load connected to the amplifier.

cable gauge			recommended maximum length					
			8 $\Omega$ load		4 $\Omega$ load		2.7 $\Omega$ load	
mm <sup>2</sup>	SWG	AWG	m	ft	m	ft	m	ft
2.5	15	13	30	100	15	50	10	33
4	13	11	50	160	25	80	17	53
6	11	9	74	240	37	120	25	80

For your installation projects, you can use the more detailed L-ACOUSTICS calculation tool to evaluate cable length and gauge based on the type and number of enclosures connected. The calculation tool is available on our website:

<http://www.l-acoustics.com/installation-outils-de-calcul-1367.html>

# Illustrations

## Loudspeaker cables



**SP.7**

4-point speakON loudspeaker cable (0.7 m / 2.3 ft)




**SP5**

4-point speakON loudspeaker cable (5 m / 16.4 ft)



**SP10**

4-point speakON loudspeaker cable (10 m / 32.8 ft)



**SP25**

4-point speakON loudspeaker cable (25 m / 82 ft)



**DO.7**

8-point PA-COM loudspeaker cable (0.7 m / 2.3 ft)



**DO10**

8-point PA-COM loudspeaker cable (10 m / 32.8 ft)



**DO25**

8-point PA-COM loudspeaker cable (25 m / 82 ft)



**DOSUB-LA8**

breakout cable for four passive enclosures



**SP-Y1**

breakout cable for two passive enclosures

# Specifications

## K2 specifications

---




<b>Description</b>	3-way full-range active WST enclosure, quad-amplified by LA4X / LA8
<b>Usable bandwidth (-10 dB)</b>	35 Hz - 20 kHz ([K2 70])
<b>Maximum SPL<sup>1</sup></b>	145 dB ([K2 70])
<b>Nominal directivity</b>	horizontal: 110° / 70° symmetric or 90° asymmetric (35°/55° or 55°/35°) vertical: dependent upon the number of elements and the line source curvature
<b>Transducers</b>	LF: 2 x 12" MF: 4 x 6.5" HF: 2 x 3" diaphragm compression driver, DOSC waveguide
<b>Acoustical load</b>	bass-reflex
<b>Nominal impedance</b>	LF: 2 x 8 Ω MF: 8 Ω HF: 16 Ω
<b>Connectors</b>	IN: 1 x 8-point PA-COM LINK: 1 x 8-point PA-COM
<b>Rigging and handling</b>	captive 4-point rigging system inter-enclosure angles: 0.25°, 1°, 2°, 3°, 4°, 5°, 7.5° or 10°
<b>Weight (net)</b>	56 kg / 123.2 lb
<b>Cabinet</b>	first grade Baltic birch plywood
<b>Front</b>	high grade steel grill with anti-corrosion coating acoustically neutral 3D fabric
<b>Rigging components</b>	high grade steel with anti-corrosion coating
<b>Finish</b>	dark grey brown Pantone 426C pure white RAL 9010
<b>IP</b>	IP45

<sup>1</sup> Peak level at 1 m under free field conditions using 10 dB crest factor pink noise with specified preset.





## K2 dimensions

400 mm / 15.8 in

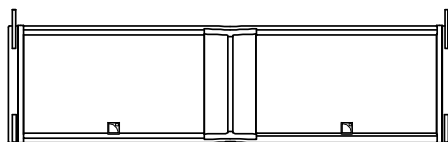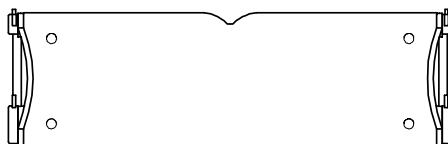

1338 mm / 52.7 in

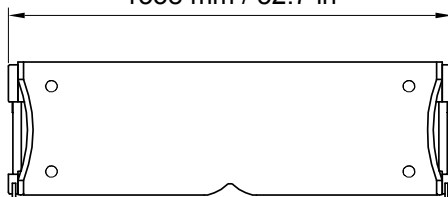


K1-SB specifications

Description	K1-SB system subwoofer 2 x15", amplified by LA8
Low frequency limit	35 Hz ([K1SB_X])
Maximum SPL <sup>1</sup>	143 dB ([K1SB_X])
Transducers	LF: 2 x 15", 4" coil, magnesium-die basket, vented magnet design
Acoustical load	bass-reflex
Nominal impedance	LF: 4 Ω
Connectors	IN: 1 x 4-point speakON
Rigging and handling	<p>captive 4-point rigging system</p> <p>0°, 0.5°, 1°, 1.5°, 2°, 2.5°, 3°, 4° or 5°</p> <p>handles integrated into the cabinet</p>
Weight (net)	83 kg / 183 lb
Cabinet	first grade Baltic birch plywood
Finish	dark grey brown Pantone 426C
Front	<p>high grade steel grill with anti-corrosion coating</p> <p>acoustically neutral 3D fabric</p>
Rigging components	high grade steel with anti-corrosion coating

<sup>1</sup> Peak level measured at 1 m under half space conditions using 10 dB crest factor pink noise with specified preset.

K1-SB dimensions

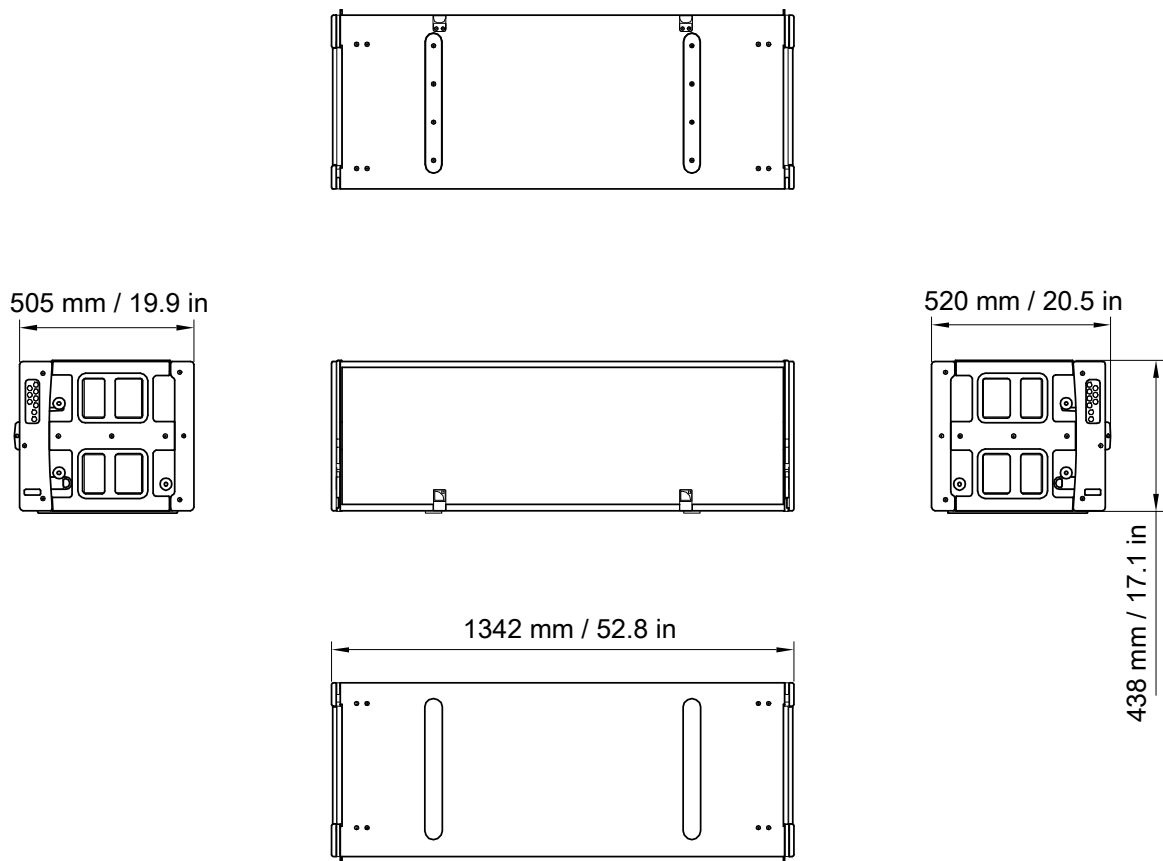

SB28 specifications

Description	high power subwoofer 2×18", amplified by LA8
Low frequency limit	25 Hz ([SB28_100])
Maximum SPL <sup>1</sup>	140 dB ([SB28_100])
Transducers	LF: 2 × 18" neodymium, direct radiation
Acoustical load	bass-reflex
Nominal impedance	LF: 4 Ω
Connectors	IN: 1 × 4-point speakON
Rigging and handling	integrated rigging system handles integrated in the cabinet
Weight (net)	93 kg / 205 lb
Cabinet	first grade Baltic birch plywood
Finish	dark grey brown Pantone 426C
Front	high grade steel grill with anti-corrosion coating acoustically neutral 3D fabric
Rigging components	aluminium

<sup>1</sup> Peak level measured at 1 m under half space conditions using 10 dB crest factor pink noise with specified preset.

SB28 dimensions

